

---

## S P E C   F I L E

---



The PT-EZ570L is not equipped with a lens.

Product Number : **PT-EZ570/EZ570L**

Product Name : LCD Projectors

**Specifications****Main unit**

Power supply	100–240 V AC, 50/60 Hz
Power consumption	490 W (492 VA) (0.4 W with STANDBY MODE set to ECO <sup>*1</sup> , 11 W with STANDBY MODE set to NETWORK.)
Optical system	Dichroic mirror separation/prism synthesis system
LCD panel	Panel size 19.2 mm (0.76 inches) diagonal (16:10 aspect ratio) Display method Transparent LCD panel ( $\times$ 3, R/G/B) Pixels 2,304,000 (1,920 $\times$ 1,200) $\times$ 3, total of 6,912,000 pixels Pixel configuration Stripe
Lens	Powered zoom/focus lens (1.7–2.8:1), F 1.7–2.3, f 26.9–45.4 mm Optional powered zoom/focus lenses and fixed-focus lens
Lamp	330 W UHM lamp
Screen size	1.02–10.16 m (40–400 inches), 16:10 aspect ratio
Brightness <sup>*2</sup>	5,000 lumens (LAMP POWER: AUTO/NORMAL)
Center-to-corner uniformity <sup>*2</sup>	90%
Contrast <sup>*2</sup>	5,000:1 (full on / full off, LAMP POWER: AUTO)
Resolution	1,920 $\times$ 1,200 pixels
Scanning frequency	HDMI/DVI-I RGB YPbPr (YCbCr)  Video/S-Video
Optical axis shift	fH: 26–80 kHz, fv: 23–85 Hz, dot clock: 162 MHz or lower fH: 15–120 kHz, fv: 48–100 Hz, dot clock: 230 MHz or lower (Signals exceeding the dot clock rate of 163 MHz are downsampled.)  480i (525i): fH 15.75 kHz; fv 60 Hz, 576i (625i): fH 15.63 kHz; fv 50 Hz, 480p (525p): fH 31.50 kHz; fv 60 Hz, 576p (625p): fH 31.25 kHz; fv 50 Hz, 720 (750)/60p: fH 45.00 kHz; fv 60 Hz, 720 (750)/50p: fH 37.50 kHz; fv 50 Hz, 1035/60i: fH 33.75 kHz; fv 60 Hz, 1080 (1125)/60i: fH 33.75 kHz; fv 60 Hz, 1080 (1125)/50i: fH 28.13 kHz; fv 50 Hz, 1080/25p: fH 28.13 kHz; fv 25 Hz, 1080/25sF: fH 28.13 kHz; fv 50 Hz, 1080/24p: fH 27.00 kHz; fv 24 Hz, 1080/24sF: fH 27.00 kHz; fv 48 Hz, 1080/30p: fH 33.75 kHz; fv 30 Hz, 1080/30sF: fH 33.75 kHz; fv 60 Hz, 1080/60p: fH 67.50 kHz; fv 60 Hz, 1080/50p: fH 56.25 kHz; fv 50 Hz fH: 15.75 kHz, fv: 60 Hz [NTSC/NTSC4.43/PAL-M/PAL60] fH: 15.63 kHz, fv: 50 Hz [PAL/PAL-N/SECAM] Vertical: $\pm$ 60% (powered), horizontal: $\pm$ 10% (powered) NOTE: Optical axis shift function cannot be operated when used with the ET-ELW21.
Keystone correction range	Vertical: $\pm$ 30° (with vertical correction only) Horizontal: $\pm$ 30° (with horizontal correction only)
Installation	Ceiling/floor, front/rear
Built-in speaker	Size 3.7 cm (1-15/32 inches) (round) $\times$ 1 Output power 10 W (monaural)

Terminals	INPUT 1 HDMI IN	Menu selection HDMI 19-pin × 1, Deep Color, HDCP compatible 480p (525p), 576p (625p), 720 (750)/60p, 720 (750)/50p, 1035/60i, 1080 (1125)/60i, 1080 (1125)/50i, 1080/25p, 1080/25sF, 1080/24p, 1080/24sF, 1080/30p, 1080/30sF, 1080/60p, 1080/50p, VGA (640 × 480)–WUXGA* <sup>2</sup> (1,920 × 1,200) Audio signal: linear PCM (sampling frequencies: 48 kHz, 44.1 kHz, 32 kHz)
	DVI-D IN	DVI-D 24-pin × 1, DVI 1.0 compliant, compatible with HDCP, compatible with single link only 480p (525p), 576p (625p), 720 (750)/60p, 720 (750)/50p, 1035/60i, 1080 (1125)/60i, 1080 (1125)/50i, 1080/25p, 1080/25sF, 1080/24p, 1080/24sF, 1080/30p, 1080/30sF, 1080/60p, 1080/50p, VGA (640 × 480)–WUXGA* <sup>2</sup> (1,920 × 1,200)
	RGB IN R, G, B	D-sub HD 15-pin (female) × 1 R: 0.7 Vp-p, 75 ohms; G: 0.7 Vp-p (1.0 Vp-p for sync on G), 75 ohms; B: 0.7 Vp-p, 75 ohms; HD/VD, SYNC: high impedance, TTL (positive/negative) <b>NOTE: SYNC/HD and VD terminals do not accept tri-level sync signals.</b>
	INPUT 2 [RGB input] R, G, B	Menu selection BNC × 5 (RGB/YPBPR/YCBCR × 1) R: 0.7 Vp-p, 75 ohms; G: 0.7 Vp-p (1.0 Vp-p for sync on G), 75 ohms; B: 0.7 Vp-p, 75 ohms; HD/VD, SYNC: high impedance, TTL (positive/negative) <b>NOTE: SYNC/HD and VD terminals do not accept tri-level sync signals.</b>
	Y, Pb (Cb), Pr (Cr)	Y: 1.0 Vp-p (including sync signal); Pb (Cb), Pr (Cr): 0.7 Vp-p, 75 ohms
	VIDEO	BNC × 1, 1.0 Vp-p, 75 ohms
INPUT 3	[Component input] Y, Pb (Cb), Pr (Cr)	Menu selection RCA pin × 3 (YPBPR/YCBCR × 1) Y: 1.0 Vp-p (including sync signal); Pb (Cb), Pr (Cr): 0.7 Vp-p, 75 ohms
	VIDEO	RCA pin × 1, 1.0 Vp-p, 75 ohms
	S-VIDEO	Mini DIN 4-pin × 1, Y: 1.0 Vp-p; C: 0.286 Vp-p, 75 ohms
	MONITOR OUT (RGB output)	D-sub HD 15-pin (female) × 1 R: 0.7 Vp-p, 75 ohms; G: 0.7 Vp-p (1.0 Vp-p for sync on G), 75 ohms; B: 0.7 Vp-p, 75 ohms; HD/VD, SYNC: high impedance, TTL (positive/negative)
AUDIO IN 1	M3 (L, R) × 1, 0.5 Vrms, input impedance: 22 kilohms or more	
AUDIO IN 2	M3 (L, R) × 1, 0.5 Vrms, input impedance: 22 kilohms or more	
AUDIO IN 3	RCA (L, R) × 2, 0.5 Vrms, input impedance: 22 kilohms or more	
VARIABLE AUDIO OUT	M3 (L, R) × 1 (monitor out: 0–2.0 Vrms, variable)	
SERIAL IN	D-sub 9-pin (female) × 1, for external control (RS-232C compliant)	
REMOTE IN	M3 jack × 1 for wired remote control or link control	
LAN	RJ-45 × 1, for network connection, 100Base-TX/10Base-T, compliant with PJLink™ 3.0 m (9 ft 10 in)	
Power cord length	Molded plastic	
Cabinet materials	489.5 × 164* <sup>4</sup> × 434 mm (19-9/32 × 6-15/32* <sup>4</sup> × 17-3/32 inches) (with supplied lens)	
Dimensions (W × H × D)	PT-EZ570 PT-EZ570L PT-EZ570L Approx. 10.3 kg (22.7 lbs) (with supplied lens) Approx. 9.6 kg (21.2 lbs) (without lens)	
Weight	Approx. 9.6 kg (21.2 lbs) (without lens)	

Operation noise <sup>*2</sup>	37 dB (LAMP POWER: NORMAL), 31 dB (LAMP POWER: ECO 1 / ECO 2)
Operating temperature	0–40 °C (32–104 °F) up to 1,000 m (3,280 ft) above sea level, with fan control set to OFF, 0–30 °C (32–86 °F) between 1,000 m and 2,000 m (3,280 ft and 6,561 ft) above sea level, with fan control set to ON 1, 0–30 °C (32–86 °F) between 2,000 m and 2,700 m (6,561 ft and 8,858 ft) above sea level, with fan control set to ON 2.
Operating humidity	20%–80% (no condensation)

**Remote control unit**

Power supply	3 V DC (R03/LR03/AAA type battery × 2)
Operation range <sup>*5</sup>	Approx. 5 m (16 ft 5 in) when operated from directly in front of the signal receptor
Dimensions (W × H × D)	48 × 145 × 27 mm (1-7/8 × 5-23/32 × 1-1/16 inches)
Weight	Approx. 102 g (3.6 oz) (including batteries)

**Supplied accessories**

Power cord (× 1)
Power cord holder (× 1)
Wireless/wired remote control unit (× 1)
Batteries for remote control (AAA/R03/LR03 type × 2)
Computer cable (× 1)
Software CD-ROM (Logo Transfer Software, Multi Projector Monitoring & Control Software) (× 1)

**Optional accessories**

Zoom lens (1.3–1.7:1)	ET-ELW20
Zoom lens (2.8–4.6:1)	ET-ELT20
Zoom lens (4.6–7.2:1)	ET-ELT21
Fixed-focus lens (0.8:1)	ET-ELW21
Ceiling mount bracket	ET-PKE200H (for high ceilings) ET-PKE200S (for low ceilings)
Bracket assembly	ET-PKE200B
Replacement lamp unit	ET-LAE200
Replacement filter unit	ET-RFE200

Weights and dimensions shown are approximate. Specifications and appearance are subject to change without notice.

\*1 When the standby mode is set to eco, network functions such as power on over the LAN network will not operate, and the serial output terminal cannot be used. Also, only certain commands can be received for external control using the serial terminal.

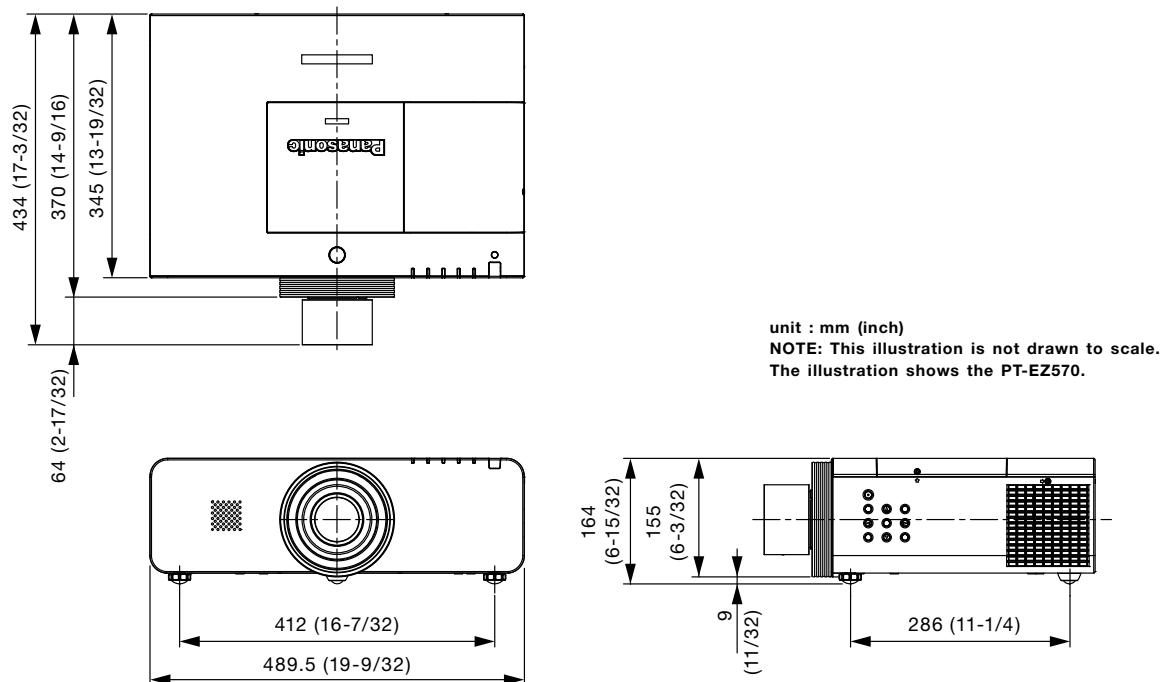
\*2 Measurement, measuring conditions, and method of notation all comply with ISO 21118 international standards.

\*3 WUXGA resolution is supported only when the signals are compliant with VESA CVT-RB (Coordinated Video Timing-Reduced Blanking).

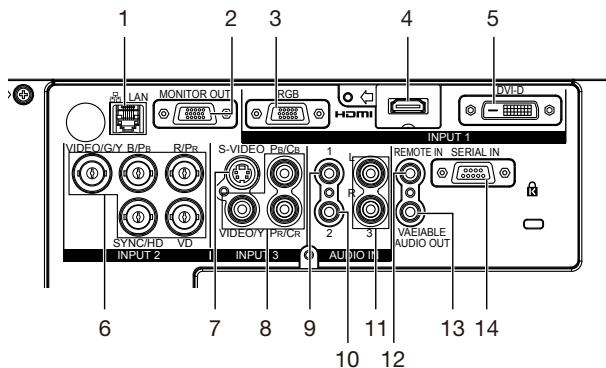
\*4 With legs at shortest position.

\*5 Operation range differs depending on environments.

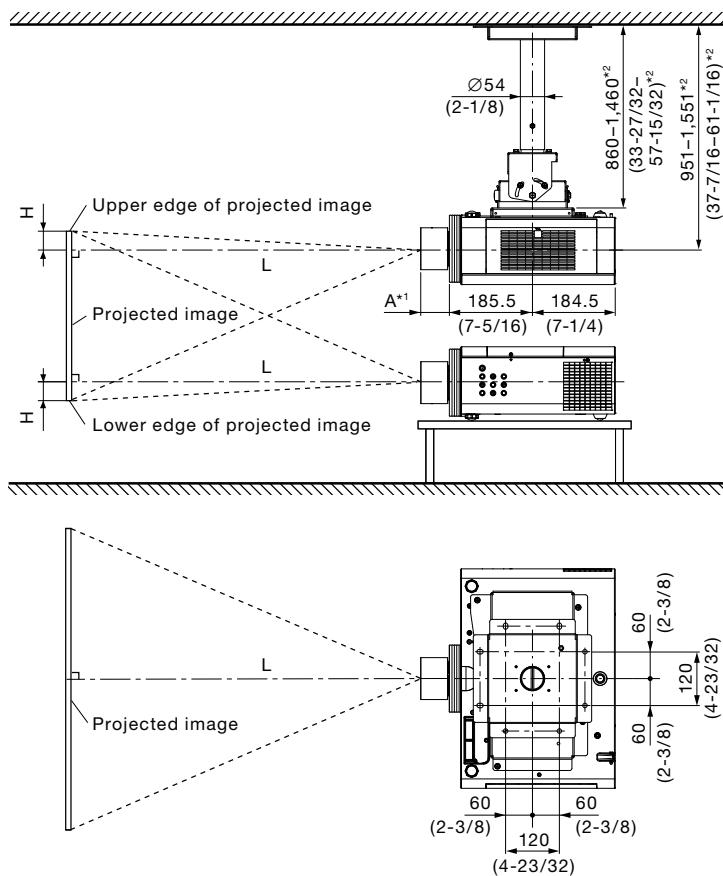
## Dimensions



## Terminals



- 1 LAN connector
- 2 RGB output
- 3 RGB input
- 4 HDMI Input
- 5 DVI-D input
- 6 RGB/component/video input
- 7 S-Video
- 8 Component/video input
- 9 Audio 1 input
- 10 Audio 2 input
- 11 Audio 3 input
- 12 Remote input
- 13 Audio output
- 14 Serial input

**Standard setting-up position**

\*1 When the lens protrudes to the maximum.  
 A: 83.5 mm (3-9/32 in) with the ET-ELW20  
 64 mm (2-17/32 in) with the supplied lens  
 88 mm (3-15/32 in) with the ET-ELT20  
 84 mm (3-5/16 in) with the ET-ELT21  
 54 mm (2-1/8 in) with the ET-ELW21

\*2 Adjustable in 30 mm (1-3/16 in) steps.

**NOTE:**

Illustrations show the projector installed using optional ceiling mount bracket ET-PKE200H and bracket assembly ET-PKE200B.

This illustration is not drawn to scale.

unit : mm (inch)

**Caution:**

- All construction work should be done by a qualified technician.
- When mounting to the ceiling, use the special mounting bracket. To prevent the projector from swaying or dropping, attach the wire between the mounting bracket and the ceiling.

## Projection distance for 16:10 aspect ratio screen

Screen size (diagonal)		Distance to screen (L)								Height from the edge of screen to center of lens (H)		Unit: meters			
		Zoom										Fixed-focus			
		ET-ELW20 Zoom lens		Supplied lens		ET-ELT20 Zoom lens		ET-ELT21 Zoom lens				ET-ELW21 Fixed-focus lens	Zoom lenses	Fixed- focus lens	
[m]	[in]	min.	max.	min.	max.	min.	max.	min.	max.	min.	max.	min.	max.	min.	
1.02 / 40		1.02	1.41	1.36	2.35	2.29	3.81	3.72	6.03	0.63		-0.05 – 0.59	0.27		
1.27 / 50		1.29	1.77	1.71	2.95	2.89	4.79	4.70	7.59	0.80		-0.07 – 0.74	0.34		
1.52 / 60		1.55	2.14	2.06	3.55	3.49	5.77	5.68	9.15	0.97		-0.08 – 0.89	0.40		
1.78 / 70		1.82	2.50	2.42	4.16	4.09	6.75	6.66	10.71	1.15		-0.09 – 1.04	0.47		
2.03 / 80		2.09	2.87	2.77	4.76	4.69	7.73	7.65	12.27	1.32		-0.11 – 1.19	0.54		
2.29 / 90		2.36	3.23	3.12	5.36	5.30	8.71	8.63	13.83	1.49		-0.12 – 1.33	0.61		
2.54 / 100		2.63	3.60	3.48	5.96	5.90	9.69	9.61	15.39	1.66		-0.14 – 1.48	0.67		
3.05 / 120		3.16	4.33	4.18	7.16	7.10	11.65	11.57	18.51	2.00		-0.16 – 1.78	0.81		
3.81 / 150		3.97	5.42	5.24	8.96	8.90	14.59	14.52	23.19	2.52		-0.20 – 2.22	1.01		
5.08 / 200		5.31	7.25	7.01	11.96	11.91	19.49	19.43	30.99	3.38		-0.27 – 2.96	1.35		
6.35 / 250		6.65	9.07	8.77	14.96	14.91	24.39	24.34	38.79	4.24		-0.34 – 3.70	1.68		
7.62 / 300		7.99	10.90	10.54	17.97	17.92	29.29	29.25	46.59	5.10		-0.40 – 4.44	2.02		
10.16 / 400		10.67	14.55	14.07	23.97	23.93	39.09	39.07	62.19	6.81		-0.54 – 5.92	2.69		

Screen size (diagonal)		Distance to screen (L)								Height from the edge of screen to center of lens (H)		Unit: feet			
		Zoom										Fixed-focus			
		ET-ELW20 Zoom lens		Supplied lens		ET-ELT20 Zoom lens		ET-ELT21 Zoom lens				ET-ELW21 Fixed-focus lens	Zoom lenses	Fixed- focus lens	
[m]	[in]	min.	max.	min.	max.	min.	max.	min.	max.	min.	max.	min.	max.	min.	
1.02 / 40		3.3	4.6	4.5	7.7	7.5	12.5	12.2	19.8	2.1		-0.2 – 1.9	0.9		
1.27 / 50		4.2	5.8	5.6	9.7	9.5	15.7	15.4	24.9	2.6		-0.2 – 2.4	1.1		
1.52 / 60		5.1	7.0	6.8	11.7	11.5	18.9	18.6	30.0	3.2		-0.3 – 2.9	1.3		
1.78 / 70		6.0	8.2	7.9	13.6	13.4	22.1	21.9	35.1	3.8		-0.3 – 3.4	1.6		
2.03 / 80		6.9	9.4	9.1	15.6	15.4	25.4	25.1	40.3	4.3		-0.4 – 3.9	1.8		
2.29 / 90		7.7	10.6	10.2	17.6	17.4	28.6	28.3	45.4	4.9		-0.4 – 4.4	2.0		
2.54 / 100		8.6	11.8	11.4	19.5	19.3	31.8	31.5	50.5	5.4		-0.4 – 4.9	2.2		
3.05 / 120		10.4	14.2	13.7	23.5	23.3	38.2	38.0	60.7	6.6		-0.5 – 5.8	2.7		
3.81 / 150		13.0	17.8	17.2	29.4	29.2	47.9	47.6	76.1	8.3		-0.7 – 7.3	3.3		
5.08 / 200		17.4	23.8	23.0	39.2	39.1	63.9	63.8	101.7	11.1		-0.9 – 9.7	4.4		
6.35 / 250		21.8	29.8	28.8	49.1	48.9	80.0	79.9	127.3	13.9		-1.1 – 12.2	5.5		
7.62 / 300		26.2	35.8	34.6	58.9	58.8	96.1	96.0	152.8	16.7		-1.3 – 14.6	6.6		
10.16 / 400		35.0	47.7	46.2	78.6	78.5	128.2	128.2	204.0	22.4		-1.8 – 19.4	8.8		

- The value for L (distance to screen) varies slightly within ±5% depending on the zoom lens characteristics.

- The zoom lens characteristics may cause slight image distortion.

- When vertical keystone correction is used, the image is corrected in the direction that reduces its projected size.

- The brightness varies depending on the zoom setting.

Note: When the fixed-focus lens ET-ELW21 is mounted, the optical lens shift function cannot be used.

## Projection distance for 16:9 aspect ratio screen

Unit: meters

Screen size (diagonal)	Distance to screen (L)								Height from the edge of screen to center of lens (H)			
	Zoom											
	ET-ELW20 Zoom lens		Supplied lens		ET-ELT20 Zoom lens		ET-ELT21 Zoom lens					
[m]	[in]	min.	max.	min.	max.	min.	max.	min.	max.			
1.02 / 40		1.05	1.45	1.40	2.42	2.36	3.92	3.83	6.20	0.65	-0.05 – 0.55	0.25
1.27 / 50		1.32	1.82	1.76	3.04	2.98	4.92	4.84	7.81	0.83	-0.06 – 0.69	0.31
1.52 / 60		1.60	2.20	2.12	3.66	3.59	5.93	5.84	9.41	1.00	-0.08 – 0.82	0.37
1.78 / 70		1.87	2.57	2.49	4.27	4.21	6.94	6.85	11.01	1.18	-0.09 – 0.96	0.44
2.03 / 80		2.15	2.95	2.85	4.89	4.83	7.95	7.86	12.62	1.36	-0.10 – 1.10	0.50
2.29 / 90		2.43	3.32	3.21	5.51	5.45	8.95	8.87	14.22	1.53	-0.11 – 1.23	0.56
2.54 / 100		2.70	3.70	3.57	6.12	6.06	9.96	9.88	15.82	1.71	-0.13 – 1.37	0.62
3.05 / 120		3.25	4.45	4.30	7.36	7.30	11.97	11.90	19.03	2.06	-0.15 – 1.64	0.75
3.81 / 150		4.08	5.58	5.39	9.21	9.15	15.00	14.93	23.84	2.59	-0.19 – 2.06	0.93
5.08 / 200		5.46	7.45	7.20	12.30	12.24	20.03	19.98	31.86	3.47	-0.25 – 2.74	1.25
6.35 / 250		6.84	9.33	9.02	15.38	15.33	25.07	25.02	39.87	4.36	-0.31 – 3.42	1.56
7.62 / 300		8.21	11.20	10.83	18.47	18.42	30.11	30.07	47.89	5.24	-0.37 – 4.11	1.87
10.16 / 400		10.97	14.96	14.46	24.64	24.60	40.18	40.17	63.92	7.00	-0.50 – 5.48	2.49

Unit: feet

Screen size (diagonal)	Distance to screen (L)								Height from the edge of screen to center of lens (H)			
	Zoom											
	ET-ELW20 Zoom lens		Supplied lens		ET-ELT20 Zoom lens		ET-ELT21 Zoom lens					
[m]	[in]	min.	max.	min.	max.	min.	max.	min.	max.			
1.02 / 40		3.4	4.8	4.6	7.9	7.7	12.8	12.6	20.4	2.1	-0.2 – 1.8	0.8
1.27 / 50		4.3	6.0	5.8	10.0	9.8	16.2	15.9	25.6	2.7	-0.2 – 2.3	1.0
1.52 / 60		5.2	7.2	7.0	12.0	11.8	19.5	19.2	30.9	3.3	-0.3 – 2.7	1.2
1.78 / 70		6.1	8.4	8.2	14.0	13.8	22.8	22.5	36.1	3.9	-0.3 – 3.2	1.4
2.03 / 80		7.1	9.7	9.3	16.0	15.8	26.1	25.8	41.4	4.4	-0.3 – 3.6	1.6
2.29 / 90		8.0	10.9	10.5	18.1	17.9	29.4	29.1	46.7	5.0	-0.4 – 4.1	1.8
2.54 / 100		8.9	12.1	11.7	20.1	19.9	32.7	32.4	51.9	5.6	-0.4 – 4.5	2.0
3.05 / 120		10.7	14.6	14.1	24.1	23.9	39.3	39.0	62.4	6.8	-0.5 – 5.4	2.5
3.81 / 150		13.4	18.3	17.7	30.2	30.0	49.2	49.0	78.2	8.5	-0.6 – 6.7	3.1
5.08 / 200		17.9	24.4	23.6	40.3	40.2	65.7	65.5	104.5	11.4	-0.8 – 9.0	4.1
6.35 / 250		22.4	30.6	29.6	50.5	50.3	82.2	82.1	130.8	14.3	-1.0 – 11.2	5.1
7.62 / 300		26.9	36.8	35.5	60.6	60.4	98.8	98.7	157.1	17.2	-1.2 – 13.5	6.1
10.16 / 400		36.0	49.1	47.4	80.8	80.7	131.8	131.8	209.7	23.0	-1.6 – 18.0	8.2

- The value for L (distance to screen) varies slightly within ±5% depending on the zoom lens characteristics.

- The zoom lens characteristics may cause slight image distortion.

- When vertical keystone correction is used, the image is corrected in the direction that reduces its projected size.

- The brightness varies depending on the zoom setting.

Note: When the fixed-focus lens ET-ELW21 is mounted, the optical lens shift function cannot be used.

**Calculation of the projection distance**

For a screen size different from the above, use the equation below to calculate the projection distance.

**Aspect ratio 16:10**

ET-ELW20	minimum	$L \text{ (m)} = (\text{diagonal screen size in inches}) \times 0.026816 - 0.055497$
	maximum	$L \text{ (m)} = (\text{diagonal screen size in inches}) \times 0.036511 - 0.053400$
<i>Supplied lens</i>	<i>minimum</i>	$L \text{ (m)} = (\text{diagonal screen size in inches}) \times 0.035305 - 0.054882$
	<i>maximum</i>	$L \text{ (m)} = (\text{diagonal screen size in inches}) \times 0.060045 - 0.048228$
ET-ELT20	minimum	$L \text{ (m)} = (\text{diagonal screen size in inches}) \times 0.060102 - 0.114022$
	maximum	$L \text{ (m)} = (\text{diagonal screen size in inches}) \times 0.098001 - 0.112874$
ET-ELT21	minimum	$L \text{ (m)} = (\text{diagonal screen size in inches}) \times 0.098214 - 0.212284$
	maximum	$L \text{ (m)} = (\text{diagonal screen size in inches}) \times 0.155996 - 0.210772$
ET-ELW21	(fixed focus)	$L \text{ (m)} = (\text{diagonal screen size in inches}) \times 0.017178 - 0.057678$

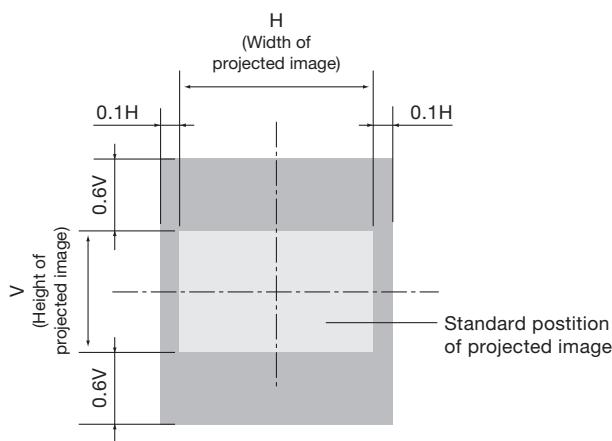
**Aspect ratio 16:9**

ET-ELW20	minimum	$L \text{ (m)} = (\text{diagonal screen size in inches}) \times 0.027561 - 0.055497$
	maximum	$L \text{ (m)} = (\text{diagonal screen size in inches}) \times 0.037526 - 0.053400$
<i>Supplied lens</i>	<i>minimum</i>	$L \text{ (m)} = (\text{diagonal screen size in inches}) \times 0.036286 - 0.054882$
	<i>maximum</i>	$L \text{ (m)} = (\text{diagonal screen size in inches}) \times 0.061714 - 0.048228$
ET-ELT20	minimum	$L \text{ (m)} = (\text{diagonal screen size in inches}) \times 0.061773 - 0.114022$
	maximum	$L \text{ (m)} = (\text{diagonal screen size in inches}) \times 0.100725 - 0.112874$
ET-ELT21	minimum	$L \text{ (m)} = (\text{diagonal screen size in inches}) \times 0.100944 - 0.212284$
	maximum	$L \text{ (m)} = (\text{diagonal screen size in inches}) \times 0.160333 - 0.210772$
ET-ELW21	(fixed focus)	$L \text{ (m)} = (\text{diagonal screen size in inches}) \times 0.017656 - 0.057678$

- Distances calculated with the above equations will include a slight error.

**Shift range**

Optical axis shift function allows to shift the position of a projected image as shown below.



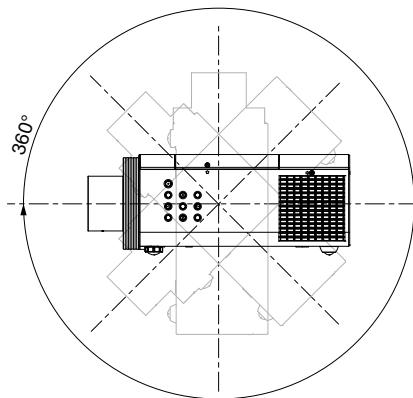
- The ET-ELW21 is a fixed short-focus lens. Therefore, the lens shift function provided in the main unit cannot be used.

**Installable angle**

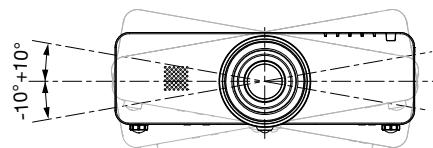
Install the projector at an angle within the range shown below.

**• Vertical direction**

The projector may be installed at a vertical angle of  $360^\circ$ .

**• Horizontal direction**

The projector may be installed at a horizontal angle of  $\pm 10^\circ$ .



**List of compatible signals**

The signals that can be input to this projector are shown in the table below. Horizontal scanning frequencies of 15 kHz to 100 kHz (15 kHz to 120 kHz for RGB signals), vertical scanning frequencies of 24 Hz to 120 Hz (48 Hz to 100 Hz for RGB signals), and a dot clock of 162 MHz maximum (230 MHz maximum for RGB signals) can be input.

**NOTE:** The native resolution of this projector is 1,920 × 1,200 pixels. If the display resolution of the input signal is different from the native resolution, image compression or expansion will be used to convert the input signal to a level within the native resolution.

Display mode	Display resolution (dots)*1	Scanning frequency H (kHz)	Scanning frequency V (kHz)	Dot clock frequency (MHz)	Format
NTSC/NTSC4.43/PAL-M/PAL60	720 × 480i	15.7	59.9	—	VIDEO/S-VIDEO
PAL/PAL-N/SECAM	720 × 576i	15.6	50.0	—	
480i (525i)	720 × 480i	15.7	59.9	27.0	HDMI
576i (625i)	720 × 576i	15.6	50.0	27.0	
480p (525p)	720 × 480i	31.5	60.0	27.0	HDMI/DVI-D
576p (625p)	720 × 576i	31.3	50.0	27.0	
480i (525i)	640 × 480i	15.7	60.0	12.3	YPbPr/RGB
576i (625i)	768 × 576i	15.6	50.0	14.8	
480p (525p)	640 × 480	31.5	59.9	25.2	
576p (625p)	768 × 576	31.3	50.0	29.5	
720p	1280 × 720	37.5	50.0	74.3	HDMI/DVI-D/
		45.0	60.0	74.3	YPbPr/RGB
1035i	1920 × 1035i	33.8	60.0	74.3	
1080i	1920 × 1080i	28.1	50.0	74.3	
		33.8	60.0	74.3	
1080p	1920 × 1080	27.0	24.0	74.3	
		28.1	25.0	74.3	
		33.8	30.0	74.3	
		56.3	50.0	148.5	
		67.5	60.0	148.5	
1080psf/30		33.8	60.0	74.3	
1080psf/25		28.1	50.0	74.3	
1080psf/24		27.0	48.0	74.3	
VGA	640 × 400	31.5	70.1	28.3	RGB
	640 × 480	31.5	59.9	25.2	HDMI/DVI-D/RGB
		37.5	75.0	31.5	RGB
		37.9	72.8	31.5	
		37.9	74.4	31.5	
		43.3	85.0	36.0	
	720 × 400	31.5	70.1	25.1	
MAC LC13	640 × 480	35.0	66.6	31.3	
MAC13		35.0	66.7	30.2	
SVGA	800 × 600	32.7	51.1	32.7	
		34.5	55.4	36.4	
		35.2	56.3	36.0	
		37.9	60.3	40.0	HDMI/DVI-D/RGB
		37.9	61.0	40.0	RGB
		38.0	60.5	40.1	
		38.6	60.3	38.6	
		46.9	75.0	49.5	
		48.1	72.2	50.0	
		53.7	85.1	56.3	
MAC16	832 × 624	49.7	74.6	57.3	
XGA	1024 × 768	43.4	60.1	65.0	HDMI/DVI-D
		44.0	54.6	59.1	RGB
		46.9	58.2	63.0	
		47.0	58.3	61.7	
		48.4	60.0	65.0	
		48.5	60.0	65.2	
		58.0	72.0	74.7	
		56.5	70.1	75.0	
		60.0	75.0	78.8	
		60.3	74.9	79.3	
		61.0	75.7	81.0	
		62.0	77.1	84.4	
		63.5	79.4	83.4	
		68.7	85.0	94.5	
	1024 × 768i	35.5	87.0	44.9	
		36.0	87.2	47.3	
MAC19	1024 × 768	60.2	75.1	80.0	


\*1 The "i" appearing after the resolution indicates an interlaced signal.

Display mode	Display resolution (dots) <sup>*1</sup>	Scanning frequency H (kHz)	V (kHz)	Dot clock frequency (MHz)	Format
WXGA	1280 × 768	47.8 60.3 68.6	59.9 74.9 84.8	79.5 102.3 117.5	HDMI/DVI-D/RGB
	1280 × 800	41.2 49.6 49.7 58.3 56.0 57.7 60.0 62.8 64.0 71.6 1360 × 768	50.0 60.1 59.8 70.0 70.0 72.0 72.0 74.9 60.0 84.9	68.6 79.4 83.5 98.9 95.0 97.8 102.8 106.5 108.0 122.5 86.7	
	1366 × 768	47.7	60.0	86.7	
	1376 × 768	56.2	72.0	100.2	
MAC21	1152 × 870	46.5	50.0	67.4	HDMI/DVI-D
SXGA	1152 × 900	48.4	60.0	86.7	HDMI/DVI-D/RGB
	1280 × 960	68.7	75.1	1000.0	RGB
	1280 × 1024	64.2 61.2 61.9	70.4 65.2 66.0	94.6 92.0 94.5	
	1280 × 1024i	71.4 60.0 60.3 62.5 63.3 63.4 63.7 63.8 63.9 64.0 71.7 77.0 80.0	75.6 60.0 58.1 58.6 60.0 60.0 60.0 60.2 60.0 60.0 60.0 67.2 72.0 75.0	105.1 108.0 93.1 108.0 108.2 111.5 109.5 108.2 107.4 108.0 117.0 130.1 135.0	
MAC	1280 × 960	64.4	76.1	135.0	
	1280 × 1024	81.1 91.1	86.0 85.0	80.0 157.5	
SXGA+	1400 × 1050	46.4 75.0 80.0	86.7 75.1 75.1	78.7 126.0 135.2	
	1440 × 900	62.5 64.0 64.0 64.7 65.1 65.3 65.4	58.6 60.0 60.2 59.9 59.9 60.0 60.1	108.0 108.2 108.0 101.0 122.4 121.8 122.9	HDMI/DVI-D/RGB
UXGA	1600 × 1200	50.0	86.0	80.0	
UXGA <sup>*2</sup>		75.0 81.3 87.5 93.8 106.3	60.0 65.0 70.0 75.0 85.0	162.0 175.5 189.0 202.5 229.5	HDMI/DVI-D/RGB RGB
WSXGA+	1680 × 1050	65.3	60.0	146.3	HDMI/DVI-D/RGB
WUXGA	1920 × 1200	74.0	59.9	154.0	
WUXGA <sup>*2</sup>		74.6	59.9	193.3	RGB

<sup>\*1</sup> The "i" appearing after the resolution indicates an interlaced signal.<sup>\*2</sup> The "REAL" mode of "SCREEN" setting cannot be operated for these modes.

**Serial connector**

The serial connector complies with RS-232C. To control the projector from a personal computer, commands must be input through communication software, based on the format and satisfying the communication conditions shown below.

**Pin assignments and signal names**

D-sub 9-pin (female) Serial input

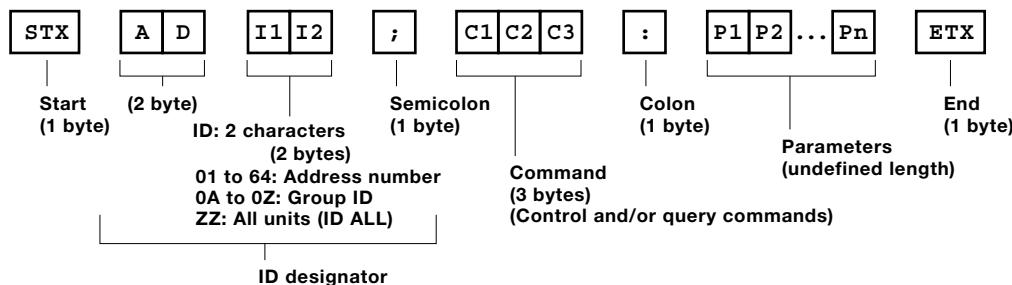
No.	Signal name	Description	No.	Signal name	Description
1	-	NC	6	-	NC
2	TXD	Transmitted data	7	CTS	Connected internally
3	RXD	Received data	8	RTS	Connected internally
4	-	Connected internally	9	-	NC
5	GND	Ground			

**Communication conditions (factory setting)**

Signal level	RS-232C-compliant
Synchronization method	Start-stop synchronization
Baud rate	19,200 bps
Parity	None
Character length	8 bits
Stop bit	1 bit
X parameter	None
S parameter	None

**Basic format**

Transmission from the computer begins with STX, then the ID, command, parameter, and ETX are sent in this order. Add parameters according to the details of control.

**CAUTION**

- It may not be possible to send or receive commands for about 10 to 60 seconds when the lamp is first turned on. If this occurs, wait for 60 seconds, then try sending or receiving again.
- When sending multiple commands, be sure to wait for at least 0.5 second after receiving a response from the projector before sending the next command.
- Additional time is sometimes required for response due to processing inside the projector. Set the time-out period for command response to 10 seconds or more.
- When using two or more units, set different IDs for each unit.

**Cable specifications**

Projector		PC (DTE)	
1	NC	1	
2		2	
3		3	
4	NC	4	
5		5	
6	NC	6	
7	NC	7	
8	NC	8	
9	NC	9	

**Control commands**

Command : Parameter	Function	Callback
<b>PON</b>	Standby power	<b>PON</b>
<b>POF</b>	Off	<b>POF</b>
<b>IIS:HD1</b>	Input selection	<b>IIS:HD1</b>
<b>IIS:DVI</b>		<b>IIS:DVI</b>
<b>IIS:RG1</b>		<b>IIS:RG1</b>
<b>IIS:RG2</b>		<b>IIS:RG2</b>
<b>IIS:CP1</b>		<b>IIS:CP1</b>
<b>IIS:VD1</b>		<b>IIS:VD1</b>
<b>IIS:CP2</b>		<b>IIS:CP2</b>
<b>IIS:SVD</b>		<b>IIS:SVD</b>
<b>IIS:VD2</b>		<b>IIS:VD2</b>
<b>OLP:2</b>	Lamp power	<b>OLP:2</b>
<b>OLP:0</b>		<b>OLP:0</b>
<b>OLP:3</b>		<b>OLP:3</b>
<b>OLP:4</b>		<b>OLP:4</b>
<b>OSH:0</b>	Shutter	<b>OSH:0</b>
<b>OSH:1</b>		<b>OSH:1</b>
<b>OFZ:1</b>	Freeze	<b>OFZ:1</b>
<b>OFZ:0</b>		<b>OFZ:0</b>
<b>OAS</b>	Auto setup	<b>OAS</b>
<b>VSE:0</b>	Screen (aspect)	<b>VSE:0</b>
<b>VSE:6</b>		<b>VSE:6</b>
<b>VSE:2</b>		<b>VSE:2</b>
<b>VSE:40</b>		<b>VSE:40</b>
<b>VSE:5</b>		<b>VSE:5</b>
<b>VSE:50</b>		<b>VSE:50</b>
<b>VPM:STD</b>	Picture	<b>VPM:STD</b>
<b>VPM:DYN</b>		<b>VPM:DYN</b>
<b>VPM:CIN</b>		<b>VPM:CIN</b>
<b>VPM:REA</b>		<b>VPM:REA</b>

\* Do not send PON, POF or OSH commands continuously in a short period of time. Doing so may burst the lamp or shorten the lamp replacement cycle.

\* When a command that cannot be executed during standby mode is sent, the projector will send an ER401 command in reply.

**Status request commands**

Command:Parameter	Function	Callback	Description
QPW	Main power status	0 0 0	Off
		0 0 1	On
QIN	Input signal status	HD1	Input 1 [HDMI]
		DVI	Input 1 [DVI-D]
		RG1	Input 1 [RGB (PC)]
		RG2	Input 2 [RGB (PC)]
		CP1	Input 2 [RGB (YPbPr/YCbCr)]
		VD1	Input 2 [Video]
		CP2	Input 3 [component]
		SVD	Input 3 [S-Video]
		VD2	Input 3 [Video]
QLP	Lamp power mode status	2	Auto
		0	Normal
		3	Eco 1
		4	Eco 2
QSH	Shutter function status	0	Off
		1	On
QFZ	Freeze function status	0	On
		1	Off
QSE	Aspect mode status	0	Normal
		6	Full
		2	Wide (16:9)
		4 0	Zoom
		5	Real
		5 0	Custom
		0	Normal
		6	Full
		STD	Standard
QPM	Picture mode status	DYN	Dynamic
		CIN	Cinema
		REA	Real
		p1p2p3p4p5	00000 – 99999 hours
Q\$T	Projector run time	p1p2p3p4	0000 – 9999 hours
Q\$L:1	Lamp run time	p1p2p3p4/p5p6p7p8 *1	Air intake
QTM:0	Temperature status	p1p2p3p4/p5p6p7p8 *1	Panel section
QTM:2			

\*1 p1p2p3p4 = Celsius (°C), p5p6p7p8 = Fahrenheit (°F)

NOTE: If a wrong command is received, the projector will send an ER401 or ER402 command to the computer.

**Command example**

To set the shutter function on, send the command as shown below.

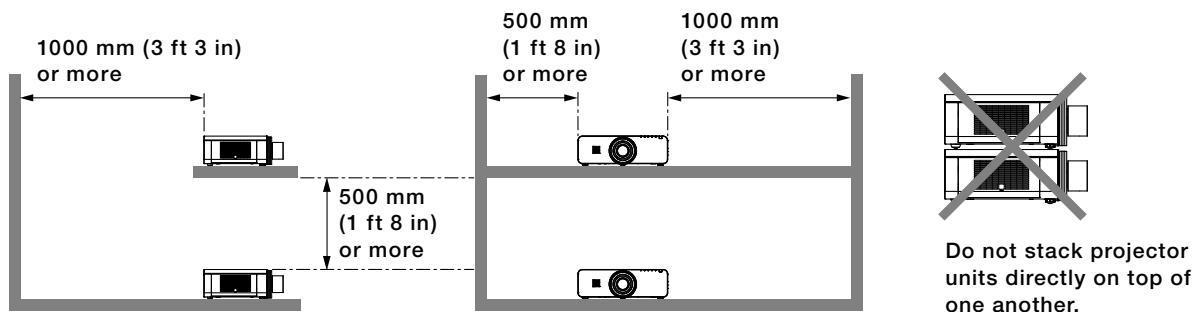
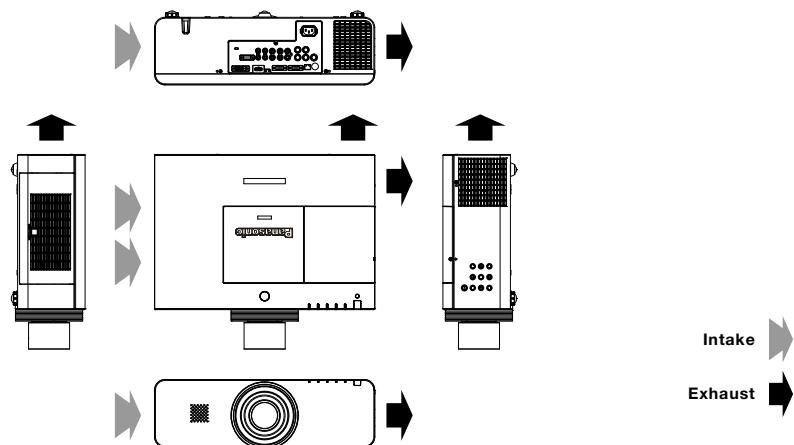
STX	ADZZ	;	OSH	:	1	ETX
Start Character code 02	ID Address ZZ: ID ALL		Command		Parameter	End Character code 03

NOTE: When sending commands without parameters, a colon (:) is not necessary.

**Notes on projector placement and operation**

The projector uses a high-wattage lamp that becomes very hot during operation. Please observe the following precautions.

1. Never place objects on top of the projector.
2. Make sure there is an unobstructed space of 1,000 mm (3 feet 3 inches) or more around the projector's exhaust openings.
3. Do not stack projector units directly on top of one another for the purpose of multiple (stacked) projection. When stacking projector units, be sure to provide the amount of space indicated below between them. These space requirements also apply to installations where only one projector unit is operating at one time and the other unit is used as a backup.
4. Make sure that nothing blocks the projector's air intake and exhaust openings. Also, install the projector so that cool or hot air from other air conditioning equipment does not flow directly toward the projector's air intake or exhaust openings.
5. Do not install the projector in an enclosed space. If it is necessary to install it in an enclosed space, add a separate ventilation system. If ventilation is insufficient, hot air will accumulate at the intake opening. This may cause the projector's protective circuit to interrupt projector operation.
6. If the projector is installed in an enclosed space, ensure that the projector's intake and exhaust openings are not blocked. Take particular care to ensure that hot air from the exhaust openings is not sucked into the intake openings.
7. When installing the projector in any manner other than floor mounting with the adjuster legs, use the five threaded ceiling mount holes (screw diameter: M6, projector interior thread length: 12 mm) to secure the projector.

**Direction of air intake and exhaust**

**Operating the projector continuously**

1. If the projector is to be operated continuously 12 hours or more, lamp replacement cycle duration becomes shorter.
2. The lamp replacement cycle duration becomes shorter if the projector is operated repeatedly for short periods.

Weights and dimensions shown are approximate. Specifications and appearance are subject to change without notice.  
Product availability differs depending on region and country. This product may be subject to export control regulations.

PJLink is a registered trademark, or a trademark application has been filed, in Japan, the United States, and other countries and regions.  
All other trademarks are the property of their respective trademark owners.